

High Speed Dome



Horizontal TV Lines



Color Camera




Auto Filter



Weatherproof

Features

- ★ 1/4" CCD Camera
- ★ 540 TV Lines of Horizontal Resolution
- ★ IR Mode - ON/OFF/Auto(Distance-100mts)
- ★ 128 Preset Positions
- ★ 256 Dome ID
- ★ 8 Privacy Zone & 4 Touring
- ★ 2.1 Interlaced Scanning System

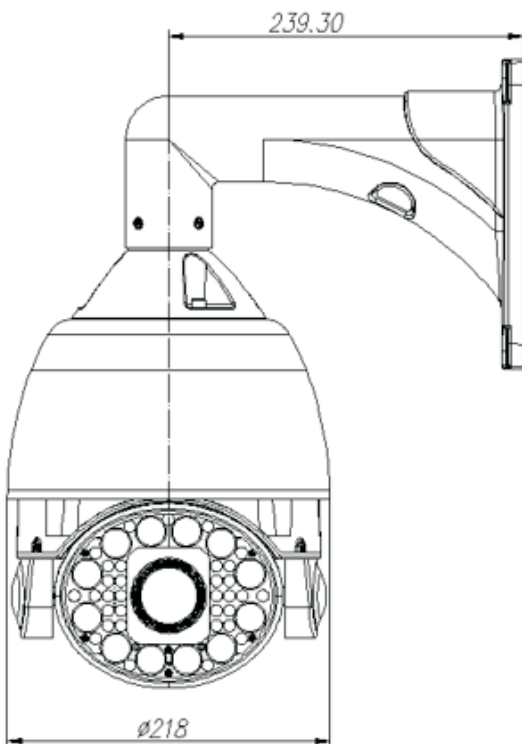

Specification

Model	SSD-270DIR	SSD-360DIR
Image Sensor	1/4" Color CCD	
Signal System	PAL/NTSC	
Horizontal Resolution	540TVL	
Minimum Illumination	0.01 Lux (Digital Slow Shutter up) 0 Lux (Night Mode)	
PAN/Angle manual speed	0°-360° (Endless) More than 0.5°~300°/sec (Zoom Proportional)	
Tilt/Angle manual speed	0~90° More than 120°~1sec (Zoom Proportional)	
Baud Rate	1200bps, 2400bps, 4800bps, 9600bps	
ID (Camera Address)	0~256 address	
Communication	Pelco-P/D(RS-485 Port)	
Preset Position	128	
OSD	English	
IR LED	12 (Very Big) & 30 (Small)	
IR Mode	W-T & W/T	
IR Switch	Auto/On/Off	
Auto Day/Night	On/Off	
IR Distance	200mts.	
Mirror	On/Off	
Aperture	0-15	
Exposure Mode	Auto/Shutter/Manual/IRIS/Bright	
Backlight	Off/On	
Privacy Zone	8	
System Act	Power up Act/Leisure Act	
Scan	Auto scan, limit scan(speed adjustable)	
Tour scan	4 tour, 16 preset position per tour, speed and dwell time can be adjustable	
Pattern scan	4 pattern, 15 minutes recording for each pattern	
Dwell setup	Home place/autoscan/tourscan/patternscan	
Body Type	IP 66	
Effective Pixels	752 (H) x 582 (V)	
S/N Ratio	50db	
Power	AC 24V 50/60HZ 1.5A	
Humidity	<90%	
Power Consumption	15w - 25w	
Operating Temperature	-20°C to 60°C	

High Speed Dome Camera (With IR & OSD)